


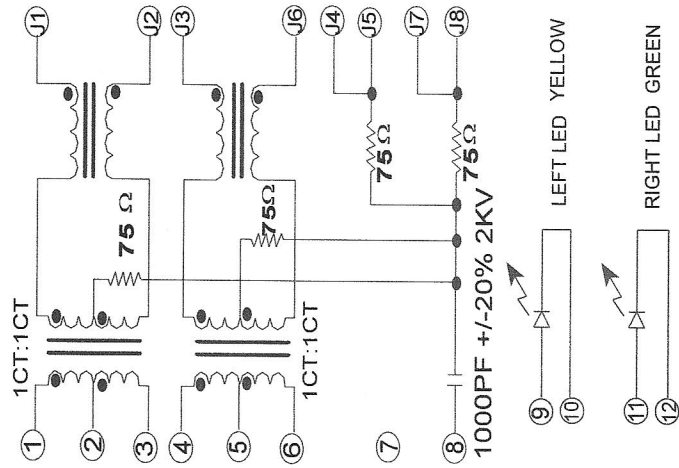

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN

30-60MHZ -14.0dB MIN

60-80MHZ -10.0dB MIN

Crosstalk: 1-30MHZ -40.0dB MIN



30-60MHZ -35.0dB MIN

60-100MHZ -30.0dB MIN


CMRR: 1-100MHZ -35.0dB MIN

Hipot:1500V AC 6S 1mA

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

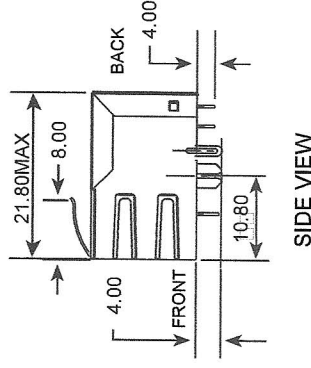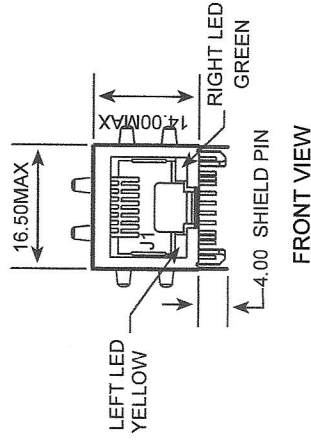

SIDE VIEW

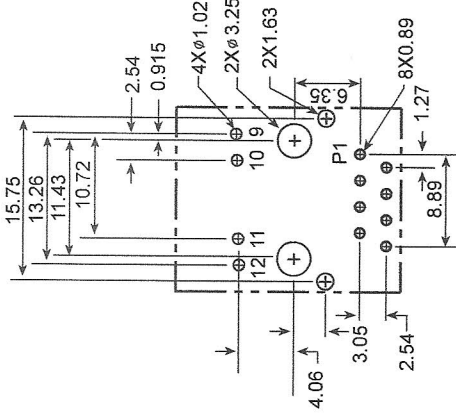

Viewed from PCB Component side

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

电话 (tel)	0755-89494830	材料 (mat'l)	材料 (mat'l)	图名 (name)	10/100BASE+LED 1x1Tab-Down RJ45
传真 (fax)	0755-81720089	UNIT:mm	UNIT:mm	料号 (Part number)	
单位 (units)	MM	设计 (draw)	邓牌剑	PBT	
比例 (scale)	1 : 1	审核 (ch'k)	朱建华	HOUSING	
版次 (rev.)	A / 1	核准 (app'd)	朱建华	PIN	
视图 (view)		日期 (date)	2006.08.18	图档 (File Name)	E:\CSC\工程图