


AK-1607-A-WWB

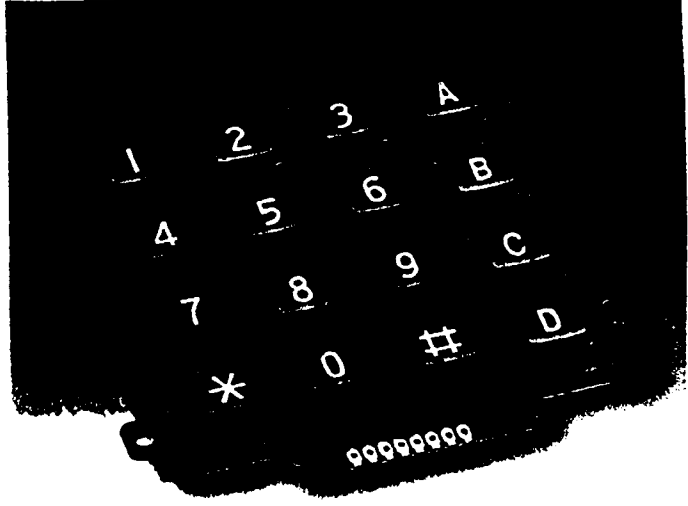


AK-1607-N-BBW

GENERAL SPECIFICATION

- Contact rating: 20mA, 24VDC
- Contact resistance: 200 ohm max
- Life: 1,000,000 cycles per key
- Operating Temperature: -20°C to +60°C
- Storage Temperature: -40°C to +65°C

CIRCUIT DIAGRAM

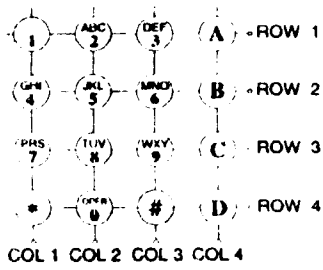

AK-1607

| OUTPUT ARRANGEMENT | |
|--------------------|--------|
| OUTPUT PIN NO. | SYMBOL |
| 1 | ROW 2 |
| 2 | ROW 3 |
| 3 | COL 1 |
| 4 | ROW 4 |
| 5 | COL 2 |
| 6 | COL 3 |
| 7 | COL 4 |
| 8 | ROW 1 |

